
AELIA



AELIA Outdoor Wall Light combina un design moderno ed elegante con una struttura raffinata, valorizzando gli spazi esterni con un'illuminazione funzionale e decorativa. Progettata per l'installazione a parete, contribuisce a creare un'atmosfera accogliente e a mettere in risalto le facciate architettoniche con uno stile contemporaneo.Ideale per ingressi, terrazze, balconi, giardini e percorsi esterni, si integra armoniosamente in diversi contesti architettonici. Grazie al suo design versatile, AELIA rappresenta una soluzione elegante per l'illuminazione architettonica outdoor.

AELIA Outdoor Wall Light combines a modern, elegant design with refined styling, enhancing outdoor spaces with functional and decorative illumination. Designed for wall mounting, it creates a welcoming atmosphere while highlighting architectural facades with a contemporary touch. Ideal for entrances, terraces, balconies, gardens, and outdoor pathways, it blends seamlessly into a variety of architectural settings.With its versatile design, AELIA offers an elegant lighting solution for modern outdoor and architectural projects.




Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
AELIA	60W	6000Lm	Ø63mm×300mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

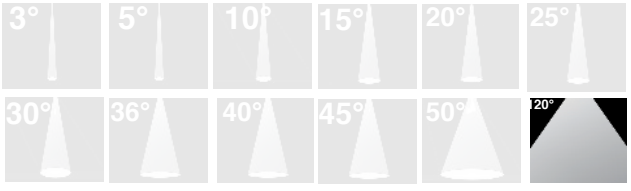

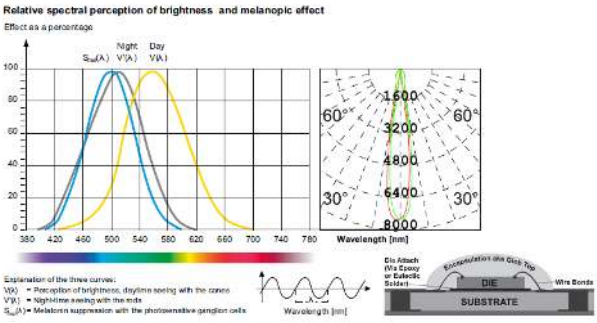

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.