
ALBA

ALBA Lampada da Parete per Esterni combina un design contemporaneo ed elegante con linee raffinate, offrendo una soluzione luminosa ideale per valorizzare gli spazi esterni. Progettata per l'installazione a parete, esalta le facciate architettoniche e crea un'atmosfera accogliente e suggestiva.Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, ALBA si integra armoniosamente in diversi stili architettonici.Grazie al suo design versatile e decorativo, ALBA rappresenta una scelta elegante per progetti di illuminazione outdoor e architettonica.



ALBA Outdoor Wall Light combines contemporary design with elegant styling, providing a refined lighting solution for modern outdoor spaces. Designed for wall mounting, it enhances architectural facades while creating a welcoming and visually appealing atmosphere around exterior areas. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ALBA blends seamlessly with a variety of architectural styles.With its versatile design and decorative appeal, ALBA is an elegant choice for modern outdoor and architectural lighting projects.




Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment. engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric/60°/120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ALBA	30W	3000Lm	165mm×170mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

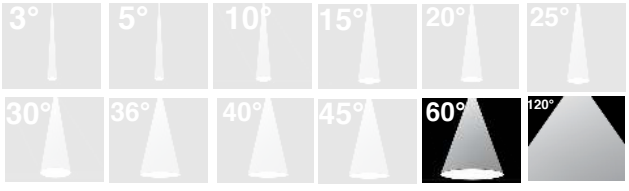

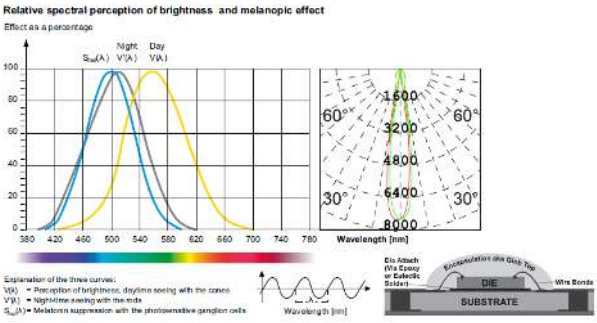

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.