
# ALERA

ALERA Lampada da Parete per Esterni unisce un design moderno ed elegante a linee raffinate, offrendo una soluzione luminosa ideale per valorizzare gli spazi esterni. Progettata per l'installazione a parete, contribuisce a mettere in risalto le facciate architettoniche e a creare un'atmosfera accogliente e suggestiva.Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, si integra armoniosamente in diversi contesti architettonici.Grazie al suo design versatile e contemporaneo, ALERA rappresenta una soluzione elegante per progetti di illuminazione outdoor e architettonica.



ALERA Outdoor Wall Light combines a modern, elegant design with refined lines, offering an ideal lighting solution for enhancing outdoor spaces. Designed for wall mounting, it highlights architectural facades while creating a welcoming and visually appealing atmosphere. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ALERA blends seamlessly into a variety of architectural settings.With its versatile and contemporary design, ALERA is an elegant choice for outdoor and architectural lighting projects.

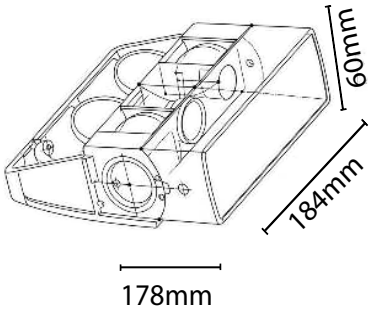


## Description


**Housing** - High-grade aluminium construction with tiger powder spraying surface teatment. engineered for superior outdoor durability and corrosion resistance.
**Diffuser -** High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
**Reflector -** Precision beam control ( Asymmetric ).
**LED -** sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21 )
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
**Standards -** Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

| Model | Power | Illuminance | Size(mm) |
|---|---|---|---|
| ALERA | 25W | 2500Lm | 178mm×184mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

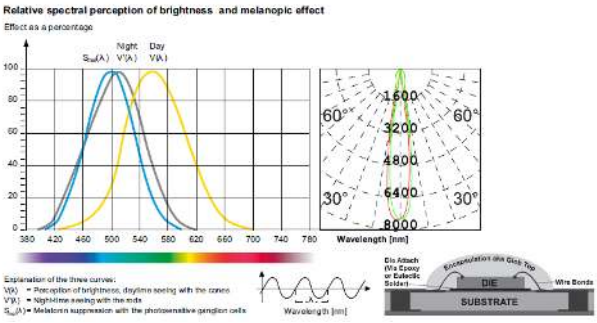


CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.