
ALERIA

ALERIA Lampada da Parete per Esterni combina un design contemporaneo con linee eleganti, offrendo una soluzione luminosa raffinata per gli ambienti esterni moderni. Progettata per l'installazione a parete, valorizza le facciate architettoniche e contribuisce a creare un'atmosfera calda e accogliente negli spazi esterni. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, ALERIA si integra armoniosamente in diversi stili architettonici. Grazie al suo aspetto raffinato e al design versatile, ALERIA rappresenta una scelta elegante per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



ALERIA Outdoor Wall Light combines a contemporary design with elegant lines, providing a stylish lighting solution for modern outdoor environments. Designed for wall mounting, it enhances architectural facades while creating a warm and inviting atmosphere around exterior spaces. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ALERIA complements a wide range of architectural styles.With its refined appearance and versatile design, ALERIA is an elegant choice for residential, commercial, and architectural outdoor lighting projects.



A	47	90	125
B	47	90	125
C	54	47	51
D	8	8	15


Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ALERIA	9W	900Lm	47mm×47mm×54mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

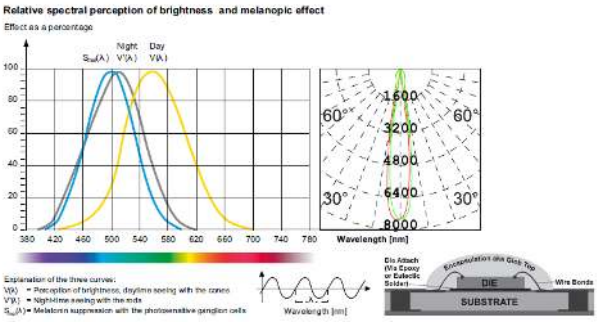

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.