
# ALTOZ GRID RD-RC

ALTOZ GRID RD-RC presenta un design architettonico compatto, lineare e senza cornice, progettato per spazi da incasso di precisione. Realizzato con ottiche fisse a teste multiple ad alte prestazioni, offre una luminosità uniforme, un controllo antiriflesso a incasso profondo e un'illuminazione affidabile per interni moderni, garantendo un profilo del soffitto elegante e pulito e un superiore comfort visivo per ambienti di lusso.

ALTOZ GRID RD-RC features a compact, linear trimless architectural design engineered for precise recessed spaces. Crafted with high-performance fixed multi-head optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination for modern interiors—delivering a sleek, clean-lined ceiling profile and superior visual comfort for luxury environments.

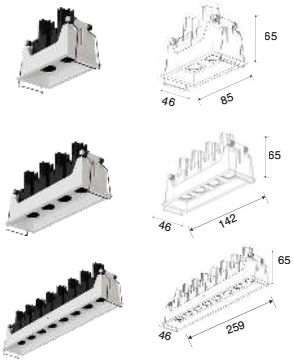



## Description


**Housing -** High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte White). Designed for recessed installation.
**Diffuser -** Polycarbonate pattern lens.
**Reflector -** Anodized aluminum with precision beam control (20° / 40°).
**LED** - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
**Standards** - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

| Model | Power | Illuminance | Size(mm) | Cutout |
|---|---|---|---|---|
| ALTOS GRID RD-RC2 | 2 x 2W | 400Lm | Ø85-46-65mm | Ø78-38mm |
| ALTOS GRID RD-RC4 | 4 x 2W | 800Lm | Ø142-46-65mm | Ø135-38mm |
| ALTOS GRID RD-RC8 | 8 x 2W | 1600Lm | Ø259-46-65mm | Ø252-38mm |

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

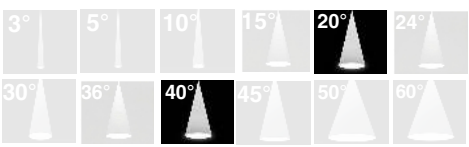

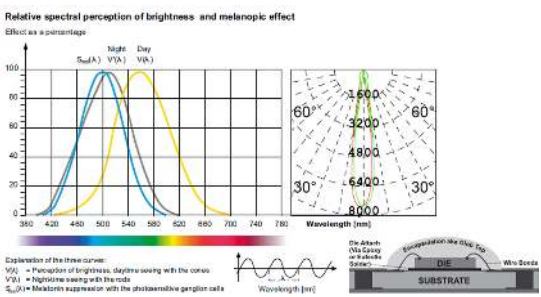
CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.