
ALTOZ GRID SQ-SR

ALTOZ GRID SQ-SR presenta un design architettonico lineare e compatto da superficie, progettato per installazioni a soffitto di precisione. Realizzato con ottiche fisse ad alte prestazioni, offre luminosità uniforme, controllo antiriflesso a incasso profondo e un'illuminazione affidabile per interni moderni, garantendo un profilo a soffitto elegante e strutturato e un superiore comfort visivo per ambienti di lusso.

ALTOZ GRID SQ-SR features a compact, linear surface-mounted architectural design engineered for precise ceiling installations. Crafted with high-performance fixed optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination for modern interiors —delivering a sleek, structured ceiling profile and superior visual comfort for luxury environments.

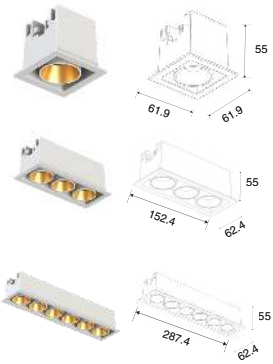


Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte White). Designed for recessed installation.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control (24°/36°/50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
ALTOZ GRID SQ-SR5	5W	500Lm	Ø61.9-61.9-55mm	Flushbonading
ALTOZ GRID SQ-SR15	15W	1500Lm	Ø152.4-62.4-55mm	Flushbonading
ALTOZ GRID SQ-SR30	30W	3000Lm	Ø287.4-62.4-55mm	Flushbonading

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

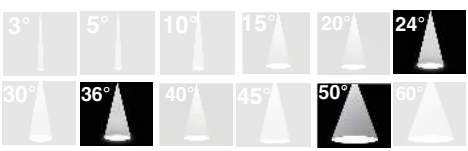

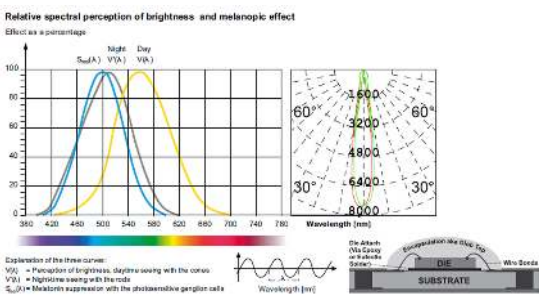

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.