
ALTOZ GRID TRM

ALTOZ GRID TRM3 presenta un design compatto e architettonico progettato per spazi di precisione. Realizzato con ottiche fisse a teste multiple ad alte prestazioni, offre luminosità uniforme, controllo antiriflesso a incasso profondo e un'illuminazione affidabile per interni moderni, offrendo un'estetica del soffitto elegante e priva di ingombri e un superiore comfort visivo per ambienti di lusso.

ALTOZ GRID TRM3 Features a compact, architectural design engineered for precision spaces. Crafted with high-performance fixed multi-head optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination for modern interiors—delivering a sleek, clutter-free ceiling aesthetic and superior visual comfort for luxury environments.

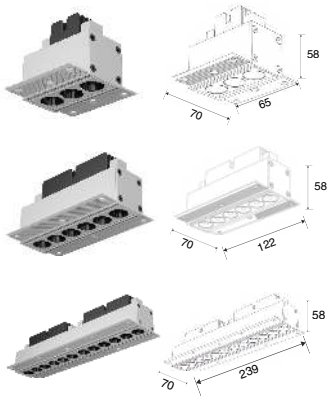


Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte White). Designed for recessed installation.
Diffuser - Polycarbonate pattern lens.
Reflector - Anodized aluminum with precision beam control (20° / 40°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
ALTOS GRID TRM3	3 x 2W	600Lm	Ø65-70-58mm	Ø67-35mm
ALTOS GRID TRM6	6 x 2W	1200Lm	Ø133-80-59mm	Ø124-35mm
ALTOS GRID TRM12	12 x 2W	2400Lm	Ø239-70-58mm	Ø241-35mm

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

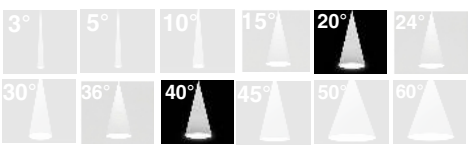

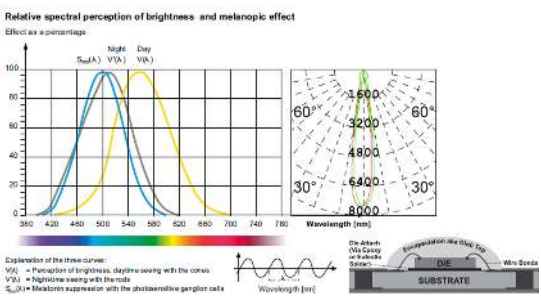

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.