ALVERO ACCESORIES

ALVERO ACS è progettato per completare i sistemi di illuminazione con tubi magnetici, offrendo accessori essenziali per un'installazione integrata e ordinata. Il suo design funzionale contribuisce a mantenere un aspetto pulito e armonioso, preservando la coerenza estetica del sistema di illuminazione. Ideale per progetti residenziali, commerciali, retail e hospitality. Combinando praticità e finiture curate, ALVERO ACS offre una soluzione affidabile per i moderni sistemi di illuminazione magnetica.



ALVERO ACS is designed to complement magnetic tube lighting systems, providing essential accessories for a seamless and well-integrated installation. Its practical design supports a clean, organized appearance while helping maintain the functionality and visual consistency of the lighting system. Ideal for residential, commercial, retail, and hospitality lighting projects. Combining practicality with a refined finish, ALVERO ACS offers a reliable accessory solution for modern magnetic lighting systems.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Voltage	Illuminance	Size(mm)
ALVERO ACS 01	DC48V	-	80×50×40mm
ALVERO ACS 02	DC48V	-	80×65×40mm
ALVERO ACS 03	DC48V	-	80×80×40mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

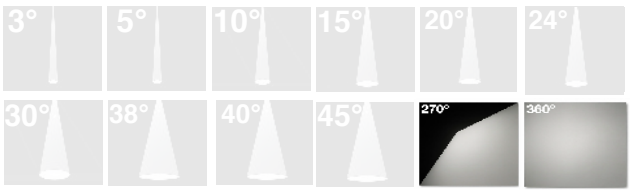

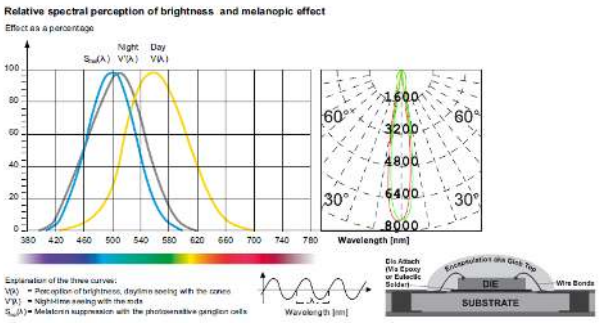

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.