
ALVERO

ALVERO Magnetic Tube Light presenta un design elegante e contemporaneo, progettato per integrarsi perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce uniforme e pulita. Il suo profilo minimalista crea un effetto luminoso raffinato, ideale per applicazioni architettoniche e progetti d'interni moderni. Adatto ad ambienti residenziali, commerciali, retail e hospitality. Combinando un'estetica elegante con prestazioni illuminotecniche versatili, ALVERO offre una soluzione sofisticata per i sistemi di illuminazione magnetica contemporanei.



ALVERO Magnetic Tube Light features a sleek, contemporary design that integrates seamlessly into magnetic track lighting systems, delivering clean and uniform illumination. Its minimalist profile creates a refined lighting effect, making it ideal for modern architectural and interior lighting applications. Suitable for residential, commercial, retail, and hospitality spaces.Combining elegant aesthetics with versatile lighting performance, ALVERO offers a sophisticated solution for contemporary magnetic lighting systems.

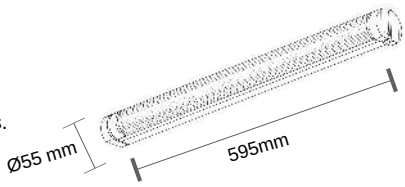



Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
ALVERO 15	15W	1500Lm	Ø55×595mm
ALVERO 30	30W	3000Lm	Ø55×1195mm
ALVERO 45	45W	4500Lm	Ø55×1765mm
ALVERO 60	60W	6000Lm	Ø55×2365mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

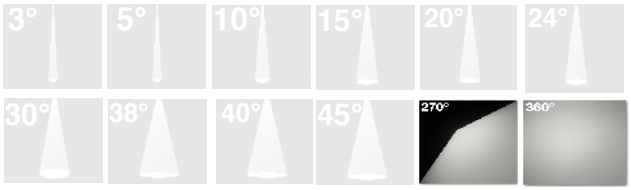

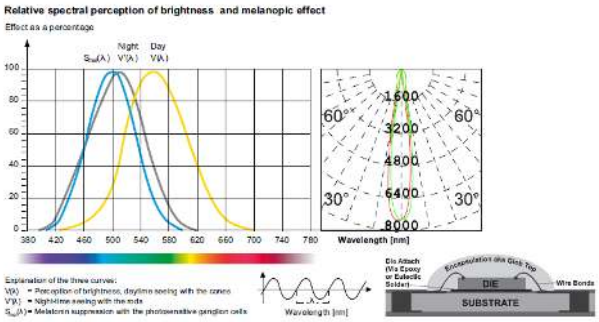

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | | | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.