
ALVIA

ALVIA Lampada da Parete per Esterni unisce un design moderno e raffinato a linee armoniose, offrendo una soluzione luminosa elegante per valorizzare gli spazi esterni. Progettata per l'installazione a parete, esalta le facciate architettoniche e contribuisce a creare un'atmosfera accogliente e suggestiva. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, ALVIA si integra perfettamente in diversi contesti architettonici. Grazie al suo design versatile e contemporaneo, ALVIA è una scelta raffinata per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



ALVIA Outdoor Wall Light combines a modern, refined design with harmonious lines, offering an elegant lighting solution for enhancing outdoor spaces. Designed for wall mounting, it highlights architectural facades while creating a welcoming and attractive atmosphere. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ALVIA blends seamlessly into a variety of architectural settings. With its versatile and contemporary design, ALVIA is an excellent choice for residential, commercial, and architectural outdoor lighting projects.

Description





Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (360°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ALVIA	20W	2000Lm	200mm×200mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

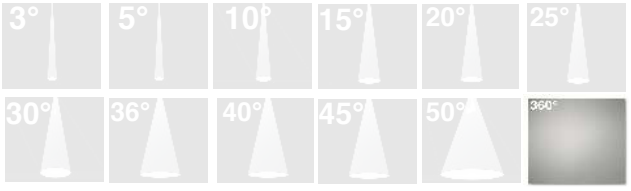

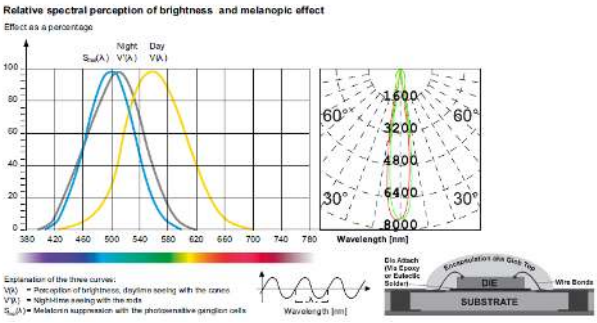

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.