
ANA TRIMLESS



ANA Trimless Spot Light offre un'illuminazione precisa e direzionata, con un design essenziale e minimalista. L'installazione senza cornice garantisce un'integrazione perfetta nel soffitto, valorizzando l'eleganza architettonica di ogni ambiente. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando un'installazione discreta, un'estetica raffinata e prestazioni illuminotecniche affidabili, ANA Trimless offre un'illuminazione sofisticata per gli interni moderni.

ANA Trimless Spot Light offers precise and focused illumination with a seamless, minimalist design. Its trimless installation creates a clean, integrated ceiling appearance, enhancing the architectural elegance of any space. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining discreet installation, refined aesthetics, and reliable lighting performance, ANA Trimless delivers sophisticated illumination for modern interiors.





Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
ANA TRIMLESS 10	10W	1000Lm	Ø108mm×H89mm	Ø65mm
ANA TRIMLESS 12	12W	1200Lm	Ø130mm×H92mm	Ø75mm
ANA TRIMLESS 24	24W	2400Lm	Ø108mm×H89mm	Ø95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

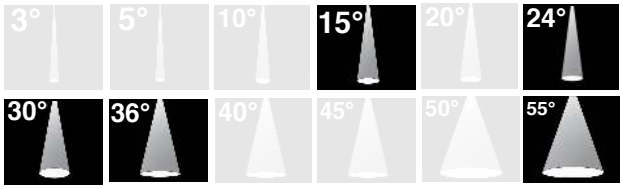

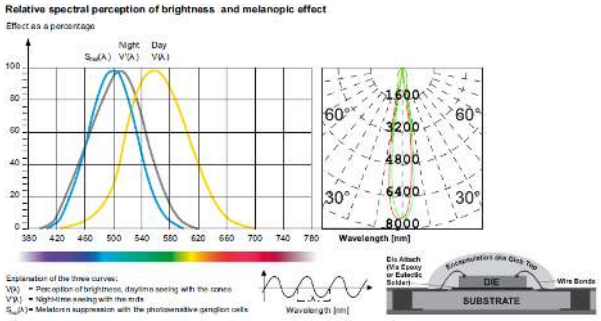

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.