
ARIA

ARIA Lampada da Parete per Esterni combina un design moderno e raffinato con linee eleganti, offrendo una soluzione luminosa sofisticata per gli spazi esterni contemporanei. Progettata per l'installazione a parete, valorizza le facciate architettoniche e crea un'atmosfera accogliente, aggiungendo un tocco decorativo distintivo. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, ARIA si armonizza con un'ampia varietà di stili architettonici. Grazie al suo aspetto elegante e al design versatile, ARIA rappresenta una scelta raffinata per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



ARIA Outdoor Wall Light combines a sleek, contemporary design with elegant styling, offering a refined lighting solution for modern exterior spaces. Designed for wall mounting, it enhances architectural facades and creates a welcoming atmosphere while adding a distinctive decorative touch. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ARIA complements a wide range of architectural styles. With its elegant appearance and versatile design, ARIA is a stylish choice for residential, commercial, and architectural outdoor lighting projects.

Description





Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ARIA	2×10W	2000Lm	65mm×60mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

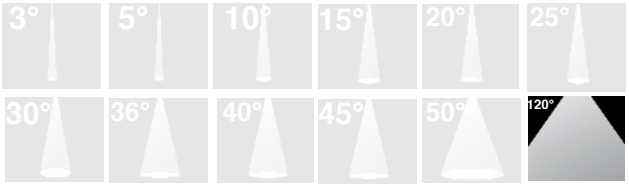

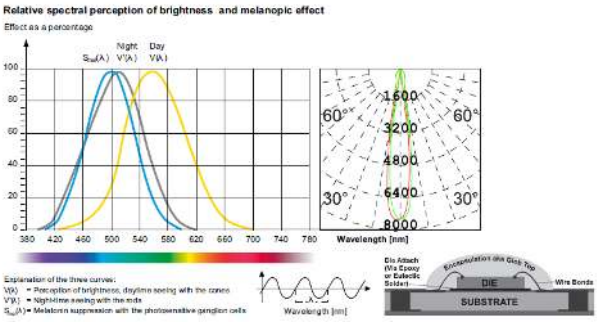

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.