SPOT LIGHT 360°

PRO LUCE


Product Datasheet

ARTEX

ARTEX 360° Adjustable Spot Light offre un'illuminazione precisa e flessibile, con un design elegante e contemporaneo. La regolazione a 360° consente di orientare la luce in base alle esigenze specifiche di ogni ambiente. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando versatilità nell'orientamento della luce, estetica raffinata e prestazioni affidabili, ARTEX valorizza ogni spazio con un'illuminazione mirata e sofisticata.




ARTEX 360° Adjustable Spot Light offers precise, flexible illumination with a sleek and contemporary design. Its 360° adjustable positioning allows light to be directed according to the specific needs of each space. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining versatile light adjustment, refined aesthetics, and reliable performance, ARTEX enhances every interior with targeted and sophisticated lighting.

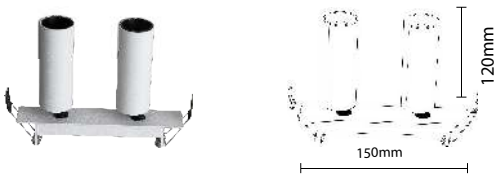

Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722
Glowing Wire Test 850°

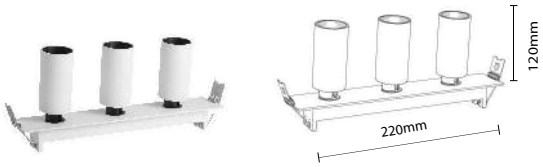


Model	Power	Illuminance	Cutout	Base Size(mm)
ARTEX 3	3W	300Lm	L32*W25mm	L40mm×W30mm×H25mm
ARTEX 6	3×2W	600Lm	L123*W25mm	L150mm×W30mm×H25mm
ARTEX 9	3×3W	900Lm	L193*W25mm	L220mm×W30mm×H25mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

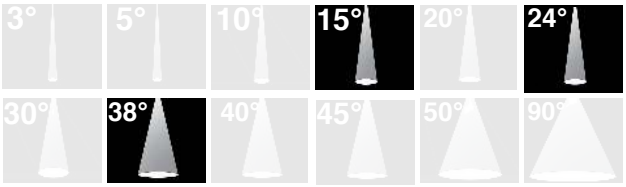

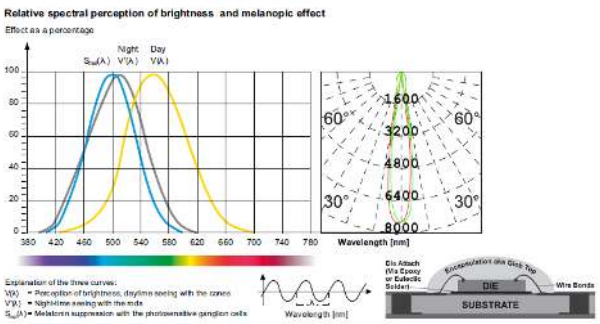

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.