
ARTIS

Il binario LED ARTIS offre un'illuminazione flessibile e precisa con fascio luminoso orientabile, ideale per ambienti retail, commerciali, hospitality e residenziali. Il design elegante e la tecnologia LED efficiente garantiscono un'eccellente distribuzione della luce, prestazioni affidabili e lunga durata.




ARTIS LED Track Light delivers flexible and precise illumination with adjustable beam direction, making it ideal for retail, commercial, hospitality, and residential spaces. Its sleek design and efficient LED technology provide excellent light distribution, reliable performance, and long-lasting durability.



Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722




Model	Power	Illuminance	Size(mm)
ARTIS 20	20W	2000Lm	Ø80mm×H88mm
ARTIS 35	35W	3500Lm	Ø100mm×H100mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

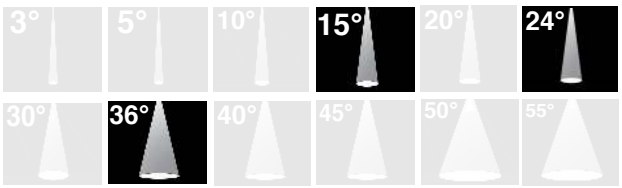

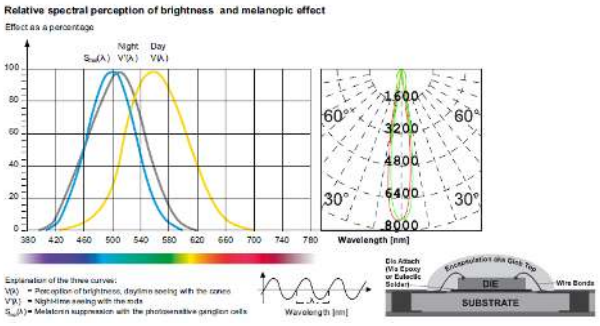

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.