
ARVELLO

ARVELLO Magnetic Tube Light presenta un design moderno ed elegante, progettato per integrarsi perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce pulita e uniforme. Il suo profilo tubolare raffinato crea un'estetica minimalista, ideale per progetti architettonici e d'illuminazione d'interni contemporanei. Adatto ad ambienti residenziali, commerciali, retail e hospitality. Combinando eleganza moderna e prestazioni illuminotecniche versatili, ARVELLO valorizza gli spazi con una soluzione d'illuminazione magnetica sofisticata e funzionale.

ARVELLO Magnetic Tube Light features a sleek, modern design that integrates effortlessly into magnetic track lighting systems, providing clean and uniform illumination. Its refined tubular profile creates a minimalist aesthetic, making it ideal for contemporary architectural and interior lighting projects. Suitable for residential, commercial, retail, and hospitality environments. Combining modern elegance with versatile lighting performance, ARVELLO enhances spaces with a sophisticated and functional magnetic lighting solution.



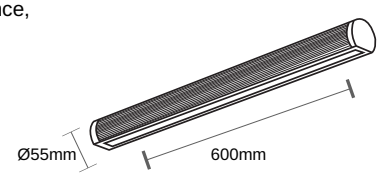


One way


Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
ARVELLO 15	15W	1500Lm	Ø55×600mm
ARVELLO 30	30W	3000Lm	Ø55×1200mm
ARVELLO 45	45W	4500Lm	Ø55×1770mm
ARVELLO 60	60W	6000Lm	Ø55×2370mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

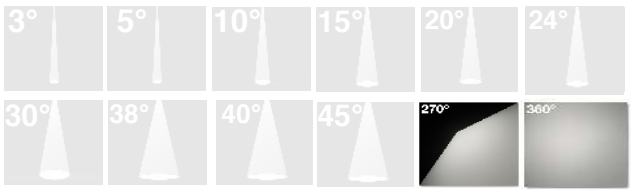

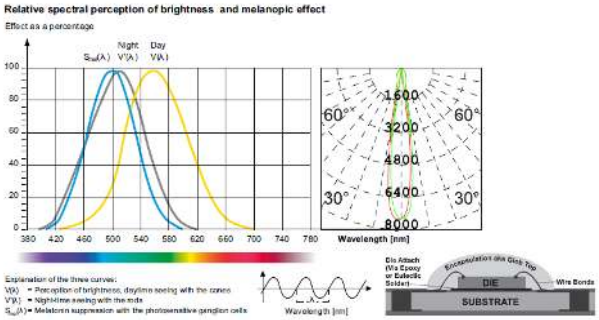

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.