
ARVEN

ARVEN è un moderno paletto architettonico con testa a disco circolare inclinata per un'illuminazione diffusa verso il basso. Unisce una tecnologia LED avanzata a una robusta struttura in alluminio con verniciatura a polvere Tiger, garantendo una durata superiore in esterni. È progettato per offrire un elevato impatto estetico e prestazioni affidabili nei contesti paesaggistici contemporanei.

ARVEN is a modern architectural bollard with a tilted circular disk head for wide-spread downward lighting. Combining advanced LED technology with a robust aluminum and Tiger powder-coated structure, it ensures superior outdoor durability. It is designed to provide both high visual appeal and reliable performance for contemporary landscape applications.



Description


Housing - Robust aluminum structure featuring a premium Tiger powder coating designed to ensure superior outdoor durability and long-lasting protection against harsh environmental conditions.
Diffuser - High-transmittance diffuser under the tilted reflector for wide, glare-free downward light.
Reflector - Precision beam control (120° / Elliptical light).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
ARVEN-10A	10W	1000Lm	Ø180-60-500mm
ARVEN-10B	10W	1000Lm	Ø180-60-650mm
ARVEN-15A	15W	1500Lm	Ø240-85-500mm
ARVEN-15B	15W	1500Lm	Ø240-85-650mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k



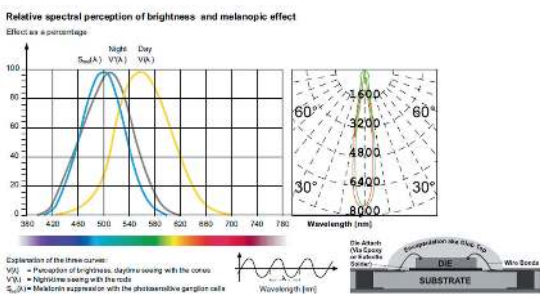

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.