
ARVIO



ARVIO Down Light offre un'illuminazione precisa e uniforme con un design elegante e contemporaneo.
La tecnologia LED avanzata garantisce un'elevata efficienza luminosa e un consumo energetico ridotto.
Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali.
Combinando prestazioni affidabili, estetica raffinata e lunga durata, ARVIO valorizza ogni ambiente con un'illuminazione elegante ed efficiente.

ARVIO Down Light delivers precise and uniform illumination with a sleek, contemporary design.
Its advanced LED technology ensures high luminous efficiency and reduced energy consumption.
Ideal for architectural, commercial, retail, hospitality, and residential applications.
Combining reliable performance, refined aesthetics, and long-lasting durability, ARVIO enhances every space with elegant and efficient lighting.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency : Lm/W , UGR < 19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
ARVIO 7	7W	700Lm	Ø93mm×H44mm	Ø75mm
ARVIO 12	12W	1200Lm	Ø115mm×H48mm	Ø95mm
ARVIO 15	15W	1500Lm	Ø140mm×H52mm	Ø115mm
ARVIO 24	24W	2400Lm	Ø163mm×H54mm	Ø145mm
ARVIO 28	28W	2800Lm	Ø195mm×H62mm	Ø165mm
ARVIO 35	35W	3500Lm	Ø230mm×H62mm	Ø195mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

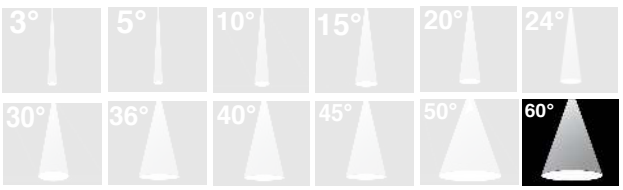

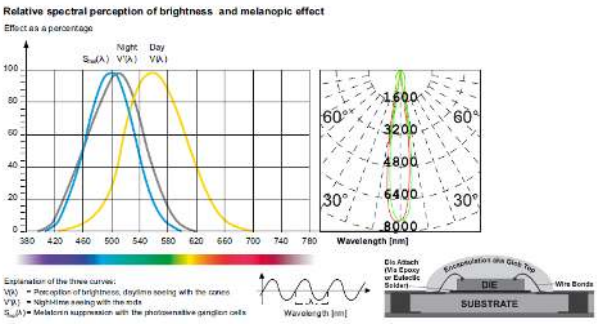

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

ANTI GLARE | EYE COMFORT | -25°C - 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.