
AVELIS

AVELIS Lampada da Parete per Esterni combina un design contemporaneo con linee pulite ed eleganti, offrendo una soluzione luminosa raffinata per gli spazi esterni moderni. Progettata per l'installazione a parete, valorizza le facciate architettoniche, creando un'atmosfera accogliente e aggiungendo un tocco decorativo sofisticato.Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, AVELIS si integra armoniosamente con diversi stili architettonici. Grazie al suo design versatile e al suo aspetto raffinato, AVELIS rappresenta una scelta eccellente per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



AVELIS Outdoor Wall Light combines a contemporary design with clean, elegant lines, offering a stylish lighting solution for modern exterior spaces. Designed for wall mounting, it enhances architectural facades while creating a welcoming atmosphere and adding a sophisticated decorative touch. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, AVELIS blends seamlessly with a variety of architectural styles.With its versatile design and refined appearance, AVELIS is an excellent choice for residential, commercial, and architectural outdoor lighting projects.




Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
AVELIS	13W	1300Lm	200mmx200mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

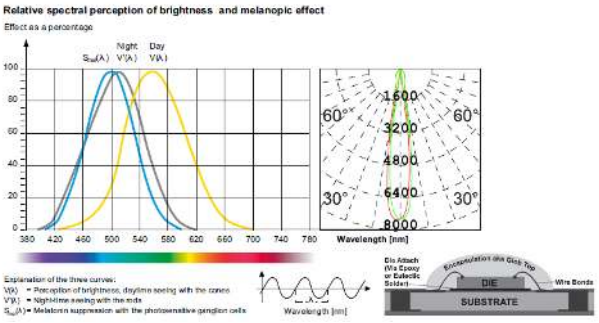

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.