

AVENA

AVENA Ceiling Recessed Light offre un'illuminazione uniforme e un'integrazione discreta nel soffitto, grazie al suo design pulito e minimalista. La tecnologia LED avanzata garantisce un'eccellente efficienza luminosa e un consumo energetico ridotto. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando un'installazione discreta, un'estetica raffinata e prestazioni affidabili, AVENA valorizza ogni ambiente con un'illuminazione elegante e funzionale.



AVENA Ceiling Recessed Light offers seamless integration and uniform illumination with a clean, minimalist design. Its advanced LED technology ensures excellent luminous efficiency and reduced energy consumption. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining discreet installation, refined aesthetics, and reliable performance, AVENA enhances every interior with elegant and functional lighting.




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for liner trimless recessed installation with mounting wings.
Diffuser - Deep-recessed optical lens with optional HONEYCOMB accessory support.
Reflector - Anodized aluminium with precision beam control (15°/24°/36°). Available in (White, Gold , Black)
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cut-out
AVENA 8	8W	800Lm	Ø90mm×H68mm	Ø70mm
AVENA 15	15W	1500Lm	Ø116mm×H58mm	Ø95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

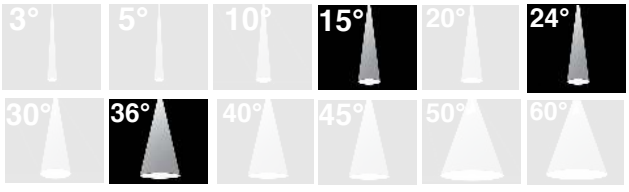

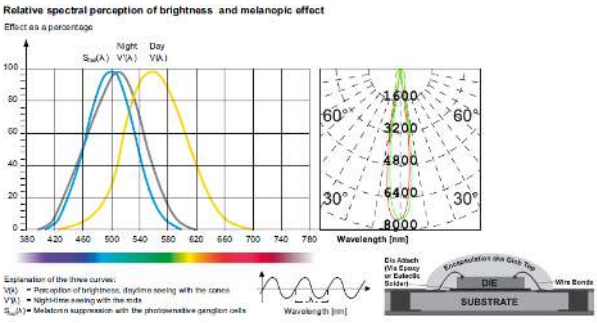

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.