
AVERO SPOT TRM FRAME

A VERO SPOT FRAME TRM ADJ presenta un design elegante con incasso regolabile, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un controllo flessibile dell'angolo del fascio luminoso, un'illuminazione confortevole antiriflesso e prestazioni affidabili, garantendo un profilo del soffitto pulito e un comfort visivo superiore per gli ambienti contemporanei.

AVERO SPOT FRAME TRM ADJ features a sleek, adjustable recessed design engineered for modern architectural applications. Crafted with high-performance precision optics, it offers flexible beam angle control, comfortable anti-glare illumination, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.





Description

Housing - Die-cast aluminium with double anti-corrosion coating (matte black, matte white, gun black, bright silver). Designed for recessed adjustable installation with a square endless adjustable face ring
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control.
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)


Failurerate: F10@ 50,000h, Ta -20°C~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
AVERO SPOT FRAME TRM ADJ	-	-	Ø98-98-56mm	Ø75-75mm

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k



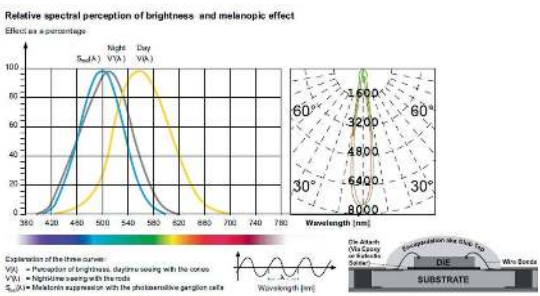

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.