
BRENA

BRENA Ceiling Recessed Light offre un'integrazione discreta e un'illuminazione uniforme, grazie al suo design elegante e contemporaneo. La tecnologia LED avanzata garantisce un'eccellente efficienza luminosa e un consumo energetico ridotto. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando un'installazione discreta, un'estetica raffinata e prestazioni affidabili, BRENA valorizza ogni ambiente con un'illuminazione elegante e funzionale.

BRENA Ceiling Recessed Light offers seamless integration and uniform illumination with a sleek, contemporary design. Its advanced LED technology ensures excellent luminous efficiency and reduced energy consumption. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining discreet installation, refined aesthetics, and reliable performance, BRENA enhances every interior with elegant and functional lighting.



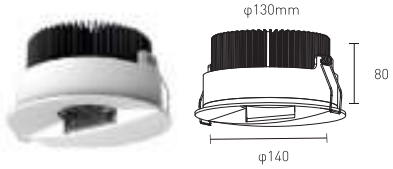


Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for liner trimless recessed installation with mounting wings.
Diffuser - Deep-recessed optical lens with optional HONEYCOMB accessory support.
Reflector - Anodized aluminium with precision beam control (15°/24°/36°). Available in (White, Gold , Black)
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)	cut-out
BRENA 30 A	30W	3000Lm	Ø140mm×H78mm	Ø130mm
BRENA 30 B	30W	3000Lm	Ø140mm×H7mm	Ø130mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

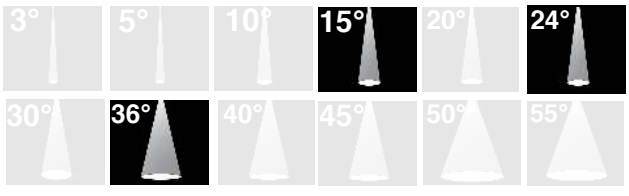

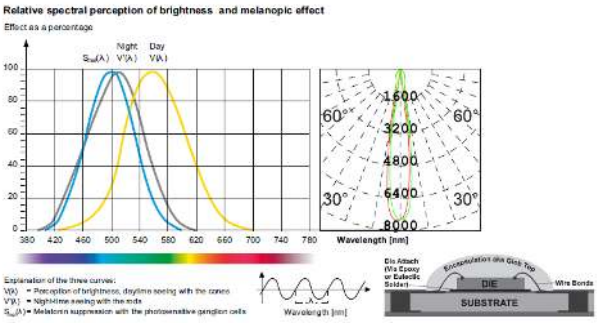

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.