

BRILL

B RILL presenta un design lineare a più teste da incasso ed elegante, progettato con ottiche di precisione ad alte prestazioni per applicazioni architettoniche moderne. Offre un'illuminazione direzionale uniforme, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento e generale pulita con un comfort visivo superiore per ambienti contemporanei.



BRILL features a sleek, linear multi-head recessed design engineered with high-performance precision optics for modern architectural applications. It offers uniform directional illumination, deep-recessed anti-glare control, and reliable performance—delivering clean accent and general lighting with superior visual comfort for contemporary environments.

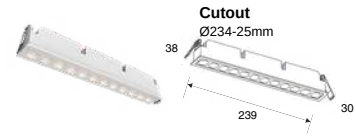


Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for linear recessed installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
BRILL COMB13	13W	1300Lm	Ø125-38-30mm	Ø120-25mm
BRILL COMB25	25W	2500Lm	Ø239-38-30mm	Ø234-25mm

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

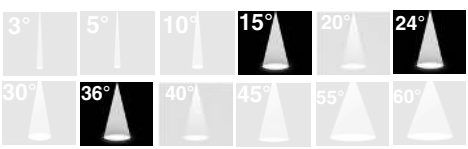

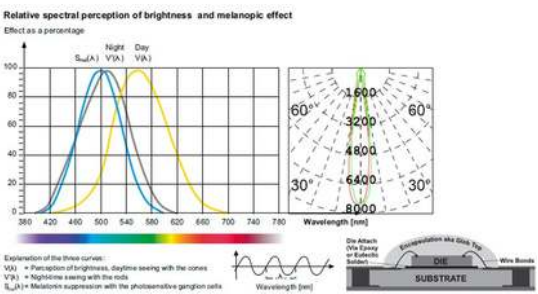

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0

Adjusting | ANTI GLARE | EYE COMFORT | -25°C 55°C | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.