C44 SURFACE

Il binario LED C44 Surface offre un'illuminazione mirata e orientabile con un elegante design a montaggio superficiale, ideale per ambienti retail, commerciali, hospitality e residenziali. La tecnologia LED efficiente garantisce una distribuzione precisa della luce, prestazioni affidabili e lunga durata.



C44 Surface LED Track Light delivers focused and adjustable illumination with a sleek surface-mounted design, ideal for retail, commercial, hospitality, and residential spaces. Its efficient LED technology ensures precise light distribution, reliable performance, and long-lasting durability.

Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722




Model	Power	Illuminance	Size(mm)
C44 SURFACE	15W	1500Lm	Ø52mm×H135mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

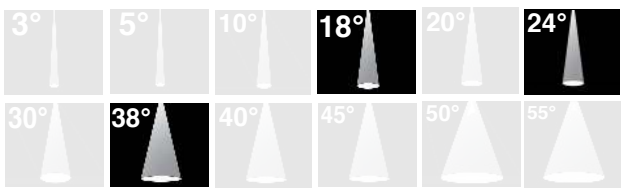

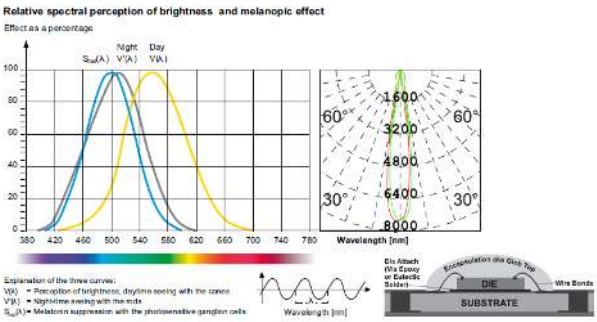

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.