
CALENO

CALENO Magnetic Tube Light presenta un design contemporaneo che si integra perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce uniforme e armoniosa. La sua forma tubolare essenziale aggiunge un tocco minimalista, rendendolo ideale per interni moderni e applicazioni di illuminazione architettonica. Adatto ad ambienti residenziali, commerciali, retail e hospitality. Combinando un'estetica raffinata con una funzionalità versatile, CALENO offre una soluzione luminosa elegante per i sistemi a binario magnetico contemporanei.



CALENO Magnetic Tube Light features a contemporary design that integrates seamlessly into magnetic track lighting systems, delivering smooth and uniform illumination. Its clean tubular form adds a minimalist touch, making it ideal for modern interiors and architectural lighting applications. Suitable for residential, commercial, retail, and hospitality spaces. Combining refined aesthetics with versatile functionality, CALENO provides an elegant lighting solution for contemporary magnetic track systems.

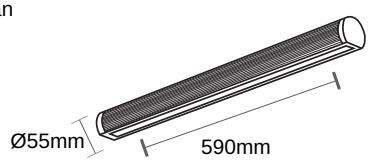

Two way


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
CALENO 15	15W	1500Lm	Ø55×590mm
CALENO 30	30W	3000Lm	Ø55×1190mm
CALENO 45	45W	4500Lm	Ø55×1760mm
CALENO 60	60W	6000Lm	Ø55×2360mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

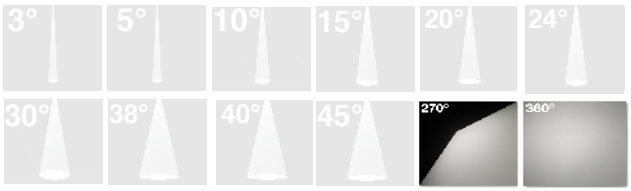

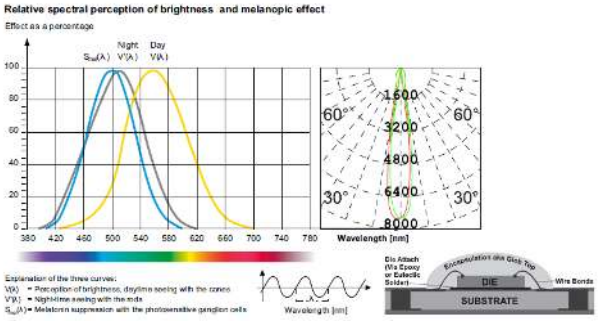

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.