CEVANI


CEVANI presenta un design da incasso orientabile ed elegante, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un'illuminazione direzionale flessibile, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento dinamica e un comfort visivo superiore per ambienti contemporanei.

CEVANI features a sleek, adjustable recessed gimbal design engineered for modern architectural applications. Crafted with high-performance precision optics, it offers flexible directional illumination, deep-recessed anti-glare control, and reliable performance—delivering dynamic accent lighting and superior visual comfort for contemporary environments.



Description

Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (White/Black). Designed for adjustable recessed gimballing installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°/24°/36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°





CutoutØ75mm

Model	Power	Illuminance	Size(mm)	Cutout
CEVANI-ADJ9	9W	900Lm	Ø90-68mm	Ø75mm
CEVANI-ADJ15	15W	1500Lm	Ø110-84mm	Ø95mm
CEVANI-ADJ20	20W	2000Lm	Ø135-113mm	Ø115mm
CEVANI-ADJ30	30W	3000Lm	Ø165-139mm	Ø145mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

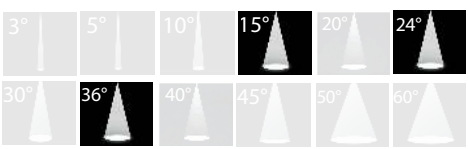

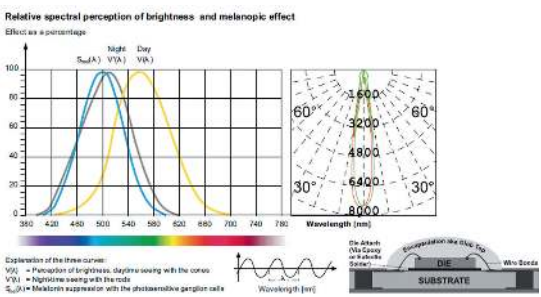

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.