
CEVRA

CEVRA è un elegante paletto luminoso architettonico caratterizzato da un corpo cilindrico sormontato da una pulita sporgenza piatta per un'illuminazione raffinata verso il basso. Unendo una tecnologia LED avanzata a una robusta struttura in alluminio con verniciatura a polvere Tiger di alta qualità, progettata per garantire una durata superiore in esterni e una protezione di lunga durata contro le condizioni ambientali avverse.

CEVRA is a sleek architectural bollard light featuring a cylindrical body capped with a clean, flat overhang for refined downward illumination. Combining advanced LED technology with a robust aluminum structure featuring a premium Tiger powder coating designed to ensure superior outdoor durability and long-lasting protection against harsh environmental conditions.





Description


Housing - Robust aluminum structure featuring a premium Tiger powder coating designed to ensure superior outdoor durability and long-lasting protection against harsh environmental conditions.
Diffuser - High-transmittance optical diffuser beneath the top overhang for clean, glare-free downward distribution.
Reflector - Precision beam control (360° / Elliptical light).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
CEVRA-15	15W	1500Lm	Ø185-35-Ø140mm
CEVRA-25	25W	2500Lm	Ø250-35-Ø190mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k



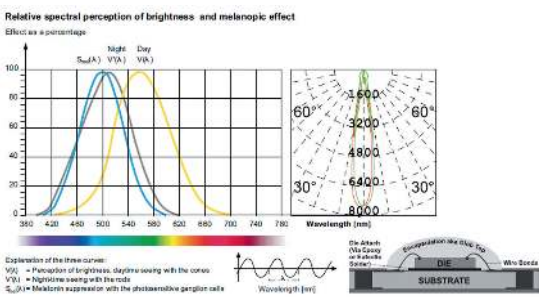

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.