
CRESA

CRESA è un versatile paletto con proiettore architettonico a teste multiple, dotato di teste cilindriche orientabili montate su un palo verticale sottile con picchetto di terra integrato. Progettato per l'illuminazione d'accento paesaggistico di fascia alta, elementi da giardino e vialetti, offre un preciso controllo direzionale (inclinazione 90° / rotazione 30°) insieme a una robusta struttura in alluminio e acciaio inossidabile.

CRESA is a versatile architectural multi-head spotlight bollard featuring adjustable cylindrical spotlight heads mounted on a slender vertical post with an integrated ground spike. Engineered for high-end landscape accent lighting, garden features, and pathway illumination, it offers precise directional control (inclinazione 90° / rotazione 30°) alongside robust aluminum and stainless steel construction.



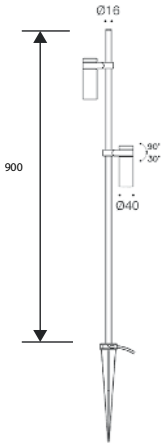


Description


Housing - High-grade aluminum and stainless steel construction with Tiger powder spraying surface treatment. Designed with an integrated ground spike base for secure outdoor installation.
Diffuser - High-performance optical diffuser designed for smooth, glare-controlled radial distribution.
Reflector - Precision beam control (15°/ 25°/ 36°/ 50°/ Elliptical light).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
CRESA-5	5W	500Lm	Ø40-Ø16-650mm
CRESA-7	7W	700Lm	Ø40-Ø16-900mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

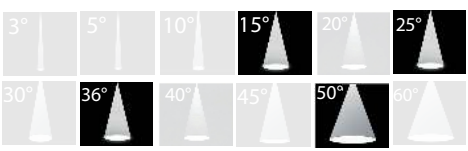

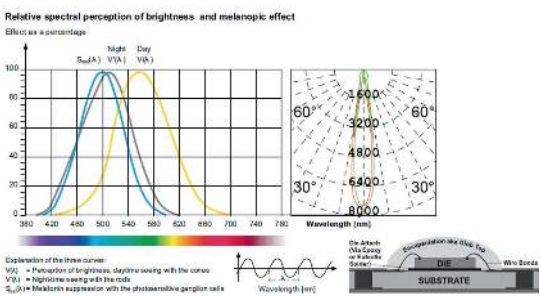

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.