
DARELA

DARELA presenta un design da incasso regolabile ed elegante, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un'illuminazione direzionale flessibile, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento dinamica e un comfort visivo superiore per ambienti contemporanei.

DARELA features a sleek, adjustable recessed design engineered for modern architectural applications. Crafted with high-performance precision optics, it offers flexible directional illumination, deep-recessed anti-glare control, and reliable performance—delivering dynamic accent lighting and superior visual comfort for contemporary environments.



CutoutØ55mm




Description


Housing - Die-cast aluminium with anti-corrosion powder coating (matte white, matte black, gun black, bright silver). Designed for recessed installation with an adjustable irradiation method.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°, 50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
DARELA ADJ5	5W	500Lm	Ø64.5-75mm	Ø55mm
DARELA ADJ10-A	10W	1000Lm	Ø83.5-85mm	Ø75mm
DARELA ADJ10-B	10W	1000Lm	Ø83.5-60mm	Ø75mm
DARELA ADJ15	15W	1500Lm	Ø103.5-107mm	Ø90mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

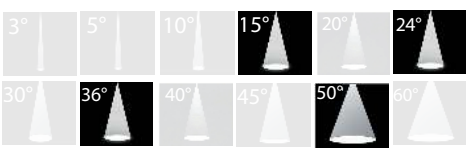

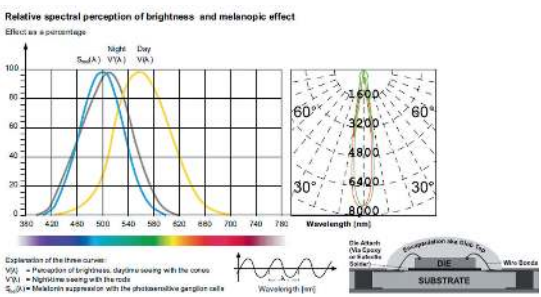

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.