
DIVEN



DIVEN Lampada da Parete per Esterni combina un design contemporaneo con linee pulite e raffinate, offrendo una soluzione luminosa elegante per gli spazi esterni moderni. Progettata per l'installazione a parete, valorizza le facciate architettoniche, creando un'atmosfera accogliente e aggiungendo un tocco decorativo sofisticato. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, DIVEN si integra armoniosamente con un'ampia varietà di stili architettonici. Grazie al suo design versatile e al suo fascino moderno, DIVEN rappresenta una scelta eccellente per progetti di illuminazione outdoor residenziale, commerciale e architettonica.

DIVEN Outdoor Wall Light combines a contemporary design with clean, refined lines, offering an elegant lighting solution for modern exterior spaces. Designed for wall mounting, it enhances architectural facades while creating a welcoming atmosphere and adding a sophisticated decorative touch. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, DIVEN complements a wide range of architectural styles. With its versatile design and modern appeal, DIVEN is an excellent choice for residential, commercial, and architectural outdoor lighting projects.




Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment. engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (5×115°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
DIVEN	10W	1000Lm	103mm×53mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

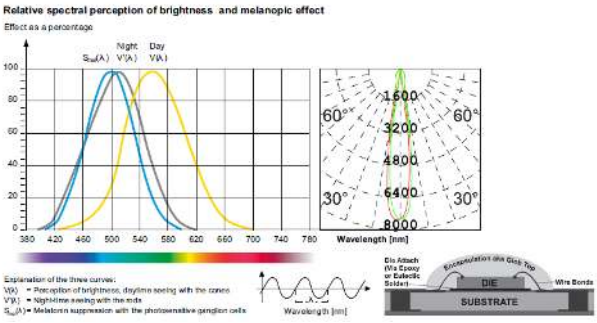

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.