SPOT LIGHT

PRO LUCE

Product Datasheet

DUROX SPOTLIGHT

DUROX SPOTLIGHT è caratterizzato da un design direzionale orientabile e compatto, progettato per installazioni a soffitto di precisione. Realizzato con ottiche orientabili ad alte prestazioni, offre luminosità uniforme, controllo antiriflesso a incasso profondo e un'illuminazione affidabile per interni moderni, garantendo un profilo a soffitto elegante e strutturato e un comfort visivo superiore per ambienti di lusso.

DUROX SPOTLIGHT features a compact, adjustable directional design engineered for precise ceiling installations. Crafted with high-performance swivel optics, it offers uniform brightness, deep-recessed anti-glare control, and reliable illumination for modern interiors—delivering a sleek, structured ceiling profile and superior visual comfort for luxury environments.




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte White/Black). Designed for recessed installation.
Diffuser - Deep-recessed polycarbonate lens with flexible directional swivel.
Reflector - Anodized aluminum with precision beam control (10°/15°/24°/36°/40°/ 50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
DUROX SPOTLIGHT-A1.5	1.5W	150Lm	Ø25-60mm	Ø25mm
DUROX SPOTLIGHT-A3	3W	300Lm	Ø35-70mm	Ø30mm
DUROX SPOTLIGHT-A5	5W	500Lm	Ø33-78mm	Ø40mm
DUROX SPOTLIGHT-B1.5	1.5W	150Lm	Ø25-60mm	Ø25mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

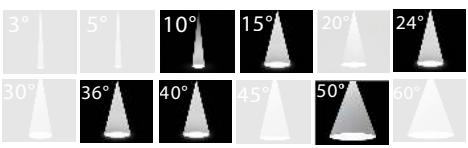

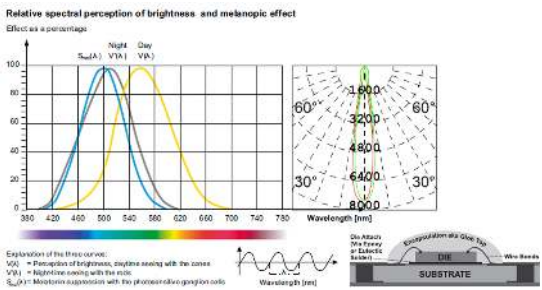

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTIGLARE | EYE COMFORT | 25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.