
EIRA

EIRA Lampada da Parete per Esterni combina un design contemporaneo con linee eleganti, offrendo una soluzione luminosa sofisticata per gli spazi esterni moderni. Progettata per l'installazione a parete, valorizza le facciate architettoniche, creando un'atmosfera accogliente e aggiungendo un raffinato tocco decorativo. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, EIRA si integra armoniosamente con diversi stili architettonici. Grazie al suo design versatile e al suo aspetto elegante, EIRA rappresenta una scelta eccellente per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



EIRA Outdoor Wall Light combines a contemporary design with elegant lines, offering a sophisticated lighting solution for modern outdoor spaces. Designed for wall mounting, it enhances architectural facades while creating a welcoming atmosphere and adding a refined decorative touch. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, EIRA blends seamlessly with a variety of architectural styles. With its versatile design and elegant appearance, EIRA is an excellent choice for residential, commercial, and architectural outdoor lighting projects.

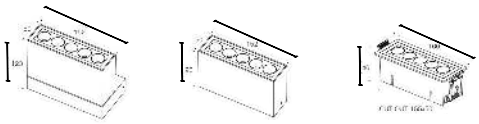


Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (15°/25°/36°/50°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
EIRA	12W	1200Lm	50mm×123mm×52mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

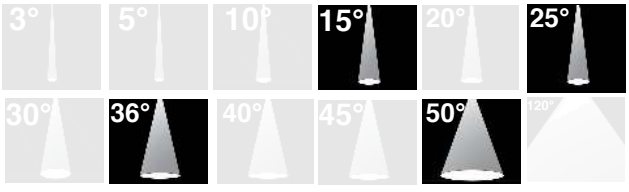

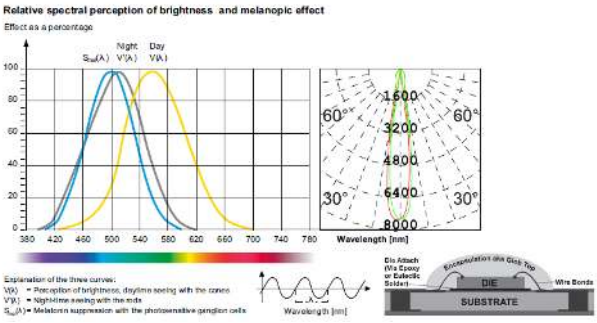

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.