
ELARA

ELARA Lampada da Parete per Esterni combina un design moderno con linee eleganti, offrendo una soluzione luminosa raffinata per gli ambienti esterni contemporanei. Progettata per l'installazione a parete, valorizza le facciate architettoniche, creando un'atmosfera calda e accogliente e aggiungendo un raffinato tocco decorativo. Ideale per ingressi, balconi, terrazze, giardini e percorsi esterni, ELARA si integra armoniosamente con un'ampia varietà di stili architettonici. Grazie al suo design versatile e al suo fascino senza tempo, ELARA rappresenta una scelta elegante per progetti di illuminazione outdoor residenziale, commerciale e architettonica.



ELARA Outdoor Wall Light combines a modern design with elegant lines, offering a refined lighting solution for contemporary outdoor environments. Designed for wall mounting, it enhances architectural facades while creating a warm, welcoming atmosphere and adding a sophisticated decorative accent. Ideal for entrances, balconies, terraces, gardens, and outdoor pathways, ELARA complements a wide range of architectural styles. With its versatile design and timeless appeal, ELARA is an elegant choice for residential, commercial, and architectural outdoor lighting projects.




Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (360°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELARA	20W	2000Lm	Ø112mm×51mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

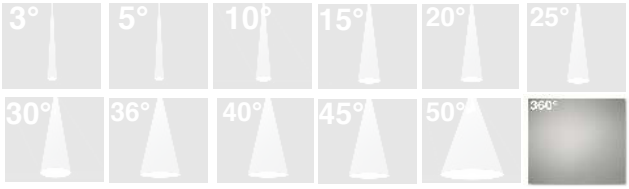

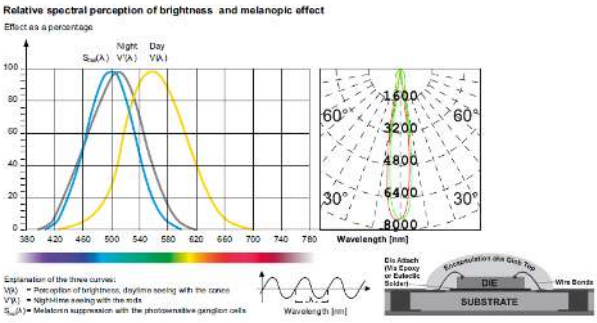

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.