
ELARIA



La lampada da parete per esterni ELARIA combina un design contemporaneo con un'eleganza essenziale, rendendola un'aggiunta raffinata agli spazi esterni moderni. Il suo aspetto ricercato valorizza il carattere architettonico degli edifici e contribuisce a creare un'atmosfera accogliente. Progettata per l'installazione a parete, ELARIA è ideale per ingressi, balconi, terrazze, muri da giardino, vialetti e facciate architettoniche.

The ELARIA Outdoor Wall Light combines contemporary design with elegant simplicity, making it a stylish addition to modern exterior spaces. Its refined appearance enhances the architectural character of buildings while creating a welcoming atmosphere. Designed for wall-mounted installation, ELARIA is suitable for outdoor areas such as entrances, balconies, terraces, garden walls, pathways, and building facades. Its versatile design complements residential, commercial, and hospitality environments, offering an attractive lighting solution for a variety of exterior applications.
al lighting projects.






Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELARIA	10W	1000Lm	150mm×150mm×37mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

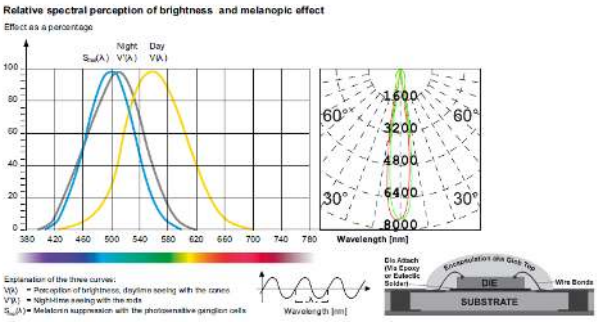

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.