ELIA


La lampada da parete per esterni ELIA combina un'estetica moderna con una semplicità senza tempo, offrendo una soluzione illuminotecnica elegante per gli spazi esterni contemporanei. Il suo design pulito e raffinato valorizza i dettagli architettonici, aggiungendo un tocco sofisticato a ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per progetti residenziali, commerciali e ricettivi, ELIA si integra armoniosamente con diversi stili architettonici, offrendo una soluzione elegante e funzionale per l'illuminazione degli ambienti esterni.



The ELIA Outdoor Wall Light combines modern aesthetics with timeless simplicity, creating an elegant lighting solution for contemporary exterior spaces. Its clean and refined design enhances architectural details while adding a sophisticated touch to entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality projects, ELIA complements a variety of architectural styles, offering a stylish and practical solution for outdoor lighting applications.



Description





Housing - High-grade aluminium construction with tiger powder spraying surface teatment. engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELIA	12W	1200Lm	Ø230mm×72mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

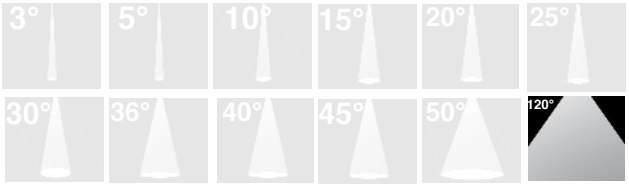

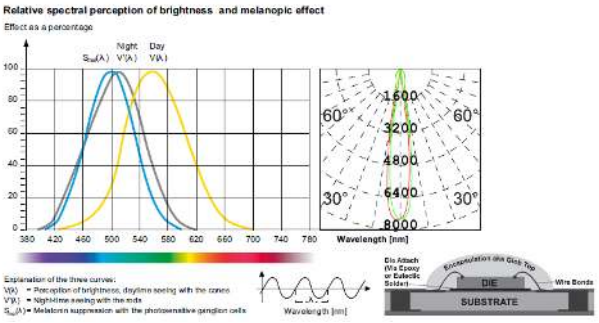

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.