ELIRA

ELIRA è un moderno paletto luminoso architettonico caratterizzato da un corpo cilindrico con apertura a finestra laterale integrata e riflettore interno per un'illuminazione direzionale e asimmetrica dei vialetti. Unendo una tecnologia LED avanzata a una robusta struttura in alluminio con verniciatura a polvere Tiger di alta qualità, progettata per garantire una durata superiore in esterni e una protezione di lunga durata contro le condizioni ambientali avverse.

ELIRA is a modern architectural bollard light featuring a cylindrical body with an integrated side window cutout and an internal reflector for directional, asymmetric pathway illumination. Combining advanced LED technology with a robust aluminum structure featuring a premium Tiger powder coating designed to ensure superior outdoor durability and long-lasting protection against harsh environmental conditions.






Description

Housing - Robust aluminum structure featuring a premium Tiger powder coating designed to ensure superior outdoor durability and long-lasting protection against harsh environmental conditions.
Diffuser - High-transmittance diffuser under the asymmetric side cutout for glare-free, directional light.
Reflector - Precision beam control (Asymmetric / Elliptical light).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)
ELIRA-10	10W	1000Lm	Ø160-623mm
ELIRA-20	20W	2000Lm	Ø160-800mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

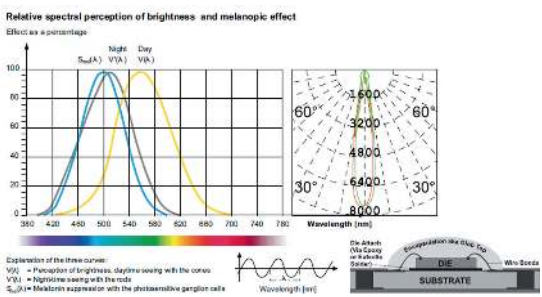

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.