
ELVARO

ELVARO Magnetic Tube Light presenta un design elegante e contemporaneo che si integra perfettamente nei sistemi di illuminazione a binario magnetico, offrendo una luce uniforme e armoniosa. Il suo profilo tubolare raffinato aggiunge un tocco minimalista, rendendolo ideale per progetti architettonici e d'illuminazione d'interni moderni. Adatto ad ambienti residenziali, commerciali, retail e hospitality. Combinando un'estetica ricercata con una funzionalità versatile, ELVARO offre una soluzione illuminotecnica sofisticata per i sistemi a binario magnetico contemporanei.

ELVARO Magnetic Tube Light features a sleek, contemporary design that integrates seamlessly into magnetic track lighting systems, delivering smooth and uniform illumination. Its elegant tubular profile adds a minimalist touch, making it ideal for modern architectural and interior lighting projects. Suitable for residential, commercial, retail, and hospitality spaces. Combining refined aesthetics with versatile functionality, ELVARO provides a sophisticated lighting solution for contemporary magnetic track systems.



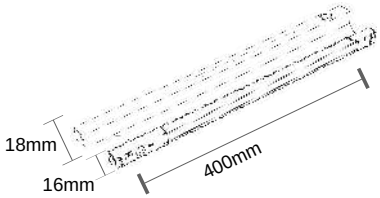

One way


Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELVARO 12	12W	1200Lm	L400×18×16mm
ELVARO 20	20W	2000Lm	L720×18×16mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

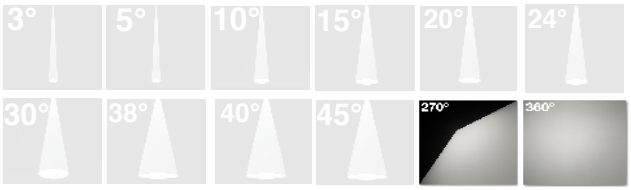

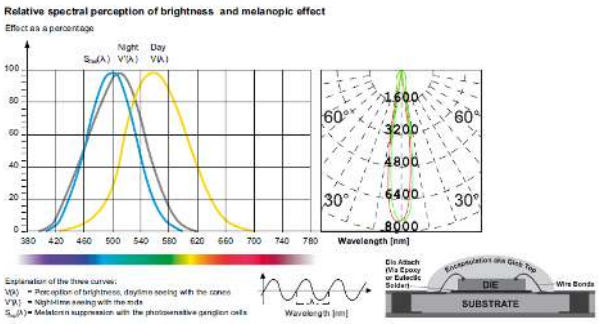

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.