
ELVETA

ELVETA Magnetic Tube Light presenta un design moderno ed elegante che si integra perfettamente nei sistemi di illuminazione a binario magnetico, garantendo una luce uniforme e armoniosa. Il suo profilo tubolare raffinato crea un'estetica minimalista, ideale per interni contemporanei e applicazioni di illuminazione architettonica. Adatto ad ambienti residenziali, commerciali, retail e hospitality. Combinando un design elegante con una funzionalità illuminotecnica versatile, ELVETA offre una soluzione sofisticata per i moderni sistemi di illuminazione magnetica.

ELVETA Magnetic Tube Light features a sleek, modern design that integrates seamlessly into magnetic track lighting systems, providing smooth and uniform illumination. Its refined tubular profile creates a minimalist aesthetic, making it ideal for contemporary interiors and architectural lighting applications. Suitable for residential, commercial, retail, and hospitality environments. Combining elegant design with versatile lighting functionality, ELVETA offers a sophisticated solution for modern magnetic lighting systems.






One way


Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELVETA 12	12W	1200Lm	L350×18×16mm
ELVETA 20	20W	2000Lm	L480×18×16mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

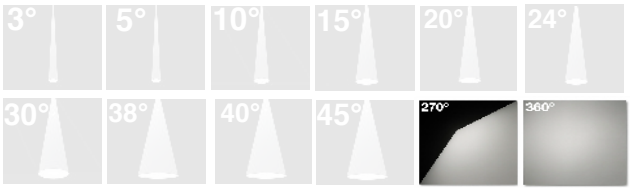

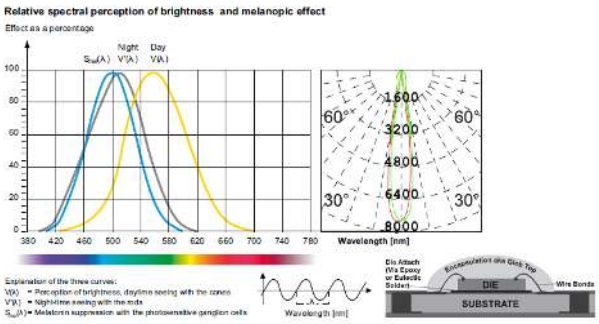

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 20 IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.