
ELVIA



La lampada da parete per esterni ELVIA combina l'eleganza contemporanea con un design raffinato, rendendola una soluzione illuminotecnica ideale per gli spazi esterni moderni. Il suo aspetto ricercato valorizza i dettagli architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Adatta a progetti residenziali, commerciali e ricettivi, ELVIA si integra armoniosamente con diversi stili architettonici, offrendo una soluzione elegante e funzionale per l'illuminazione degli ambienti esterni.

The ELVIA Outdoor Wall Light combines contemporary elegance with a refined design, making it an ideal lighting solution for modern exterior spaces. Its stylish appearance enhances architectural features while creating a welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality projects, ELVIA blends seamlessly with different architectural styles, offering an elegant and functional solution for outdoor lighting applications.




Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (120°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELVIA	15W	1500Lm	145mm×275mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

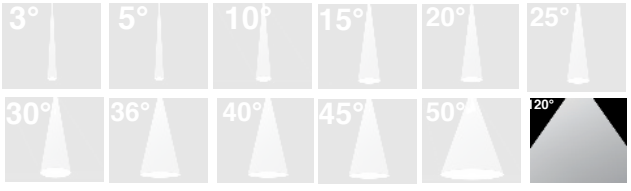

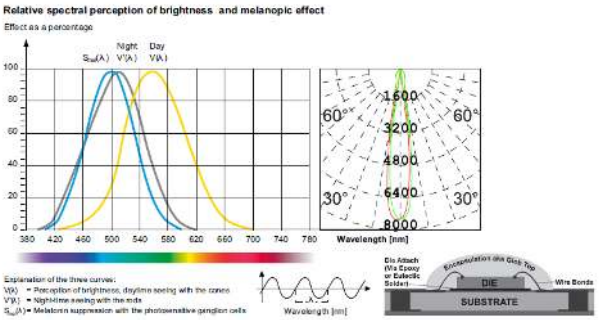

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.