
ELVIAN



La lampada da parete per esterni ELVIAN unisce uno stile contemporaneo a un'elegante semplicità, offrendo una soluzione illuminotecnica sofisticata per gli spazi esterni moderni. Il suo design raffinato valorizza i dettagli architettonici e crea un'atmosfera accogliente in ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per ambienti residenziali, commerciali e ricettivi, ELVIAN si integra armoniosamente con diversi stili architettonici, aggiungendo un tocco di eleganza e funzionalità ai progetti di illuminazione per esterni.

The ELVIAN Outdoor Wall Light combines contemporary style with elegant simplicity, offering a sophisticated lighting solution for modern exterior spaces. Its refined design enhances architectural details while creating a welcoming atmosphere in entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality environments, ELVIAN complements a variety of architectural styles, adding a touch of elegance and functionality to outdoor lighting projects.



A	155	108
B	55	56
C	50	50
D	3	3


Description

Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (Asymmetric).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
ELVIAN	3W	300Lm	56mm×155mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

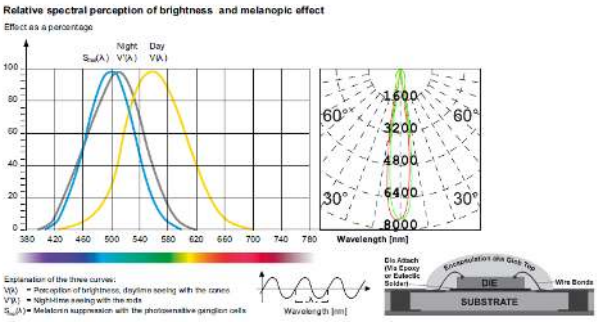

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.