
ELVIO



ELVIO Down Light offre un'illuminazione precisa e uniforme con un design elegante e moderno.
La tecnologia LED avanzata garantisce un'eccellente efficienza luminosa e un consumo energetico ridotto.
Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali.
Combinando prestazioni affidabili, estetica raffinata e lunga durata, ELVIO valorizza ogni ambiente con un'illuminazione confortevole e sofisticata.

ELVIO Down Light offers precise and uniform illumination with a sleek, modern design.
Its advanced LED technology ensures excellent luminous efficiency and reduced energy consumption.
Ideal for architectural, commercial, retail, hospitality, and residential applications.
Combining reliable performance, refined aesthetics, and long-lasting durability, ELVIO enhances every space with comfortable and sophisticated lighting.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency : Lm/W , UGR < 19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
ELVIO 7	7W	700Lm	Ø93mm×H44mm	Ø75mm
ELVIO 12	12W	1200Lm	Ø115mm×H48mm	Ø95mm
ELVIO 15	15W	1500Lm	Ø140mm×H52mm	Ø115mm
ELVIO 24	24W	2400Lm	Ø163mm×H54mm	Ø145mm
ELVIO 28	28W	2800Lm	Ø195mm×H62mm	Ø165mm
ELVIO 35	35W	3500Lm	Ø230mm×H62mm	Ø195mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

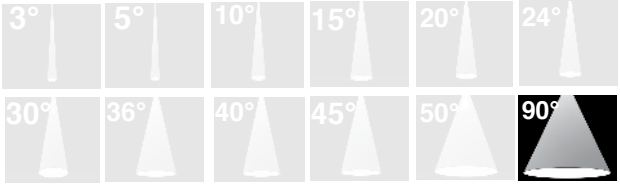

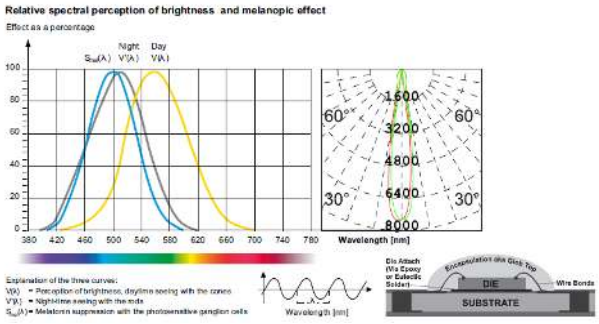

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.