
EVARA



La lampada da parete per esterni EVARA combina l'eleganza moderna con un design sofisticato, creando una soluzione illuminotecnica raffinata per gli spazi esterni contemporanei. Il suo aspetto ricercato valorizza i dettagli architettonici, aggiungendo un tocco accogliente a ingressi, balconi, terrazze, muri da giardino, vialetti e facciate degli edifici. Ideale per ambienti residenziali, commerciali e ricettivi, EVARA si integra armoniosamente con diversi stili architettonici, offrendo una soluzione elegante e funzionale per i progetti di illuminazione per esterni.

The EVARA Outdoor Wall Light combines modern elegance with a sophisticated design, creating a stylish lighting solution for contemporary exterior spaces. Its refined appearance enhances architectural features while adding a welcoming touch to entrances, balconies, terraces, garden walls, pathways, and building facades. Suitable for residential, commercial, and hospitality environments, EVARA complements a variety of architectural styles, offering an elegant and functional solution for outdoor lighting projects.




Description


Housing - High-grade aluminium construction with tiger powder spraying surface teatment.
engineered for superior outdoor durability and corrosion resistance.
Diffuser - High-transmittance optical diffuser with a precision-angled reflector for glare-free distribution.
Reflector - Precision beam control (25°/36°/50°).
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES62722 , Glowing Wire Test 850°.

Model	Power	Illuminance	Size(mm)
EVARA	2×10W	2000Lm	67mm×80mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K

k

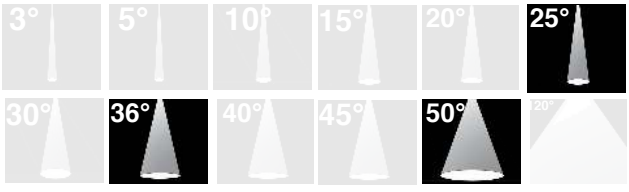

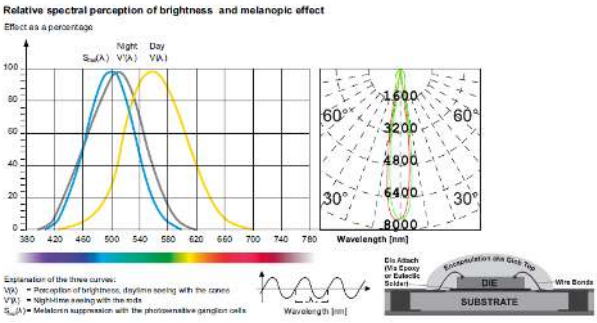

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC LIGHTING SOLUTIONS

LED | IP 66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

IK08 | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.