
EVIN

EVIN presenta un design architetturale da incasso compatto ed elegante, progettato con ottiche di precisione ad alte prestazioni per applicazioni moderne. Offre un'illuminazione direzionale focalizzata, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento e generale pulita con un comfort visivo superiore per ambienti contemporanei.

EVIN features a sleek, compact recessed architectural design engineered with high-performance precision optics for modern applications. It offers focused directional illumination, deep-recessed anti-glare control, and reliable performance—delivering clean accent and general lighting with superior visual comfort for contemporary environments.




Cutout Ø25-25mm





Cutout Ø44-25mm






Cutout Ø63-25mm





Cutout Ø44-44mm




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for compact recessed single or multi-head modular installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
EVIN-3	3W	300Lm	Ø30-30-38mm	Ø25-25mm
EVIN-6	6W	600Lm	Ø49-30-38mm	Ø44-25mm
EVIN-9	9W	900Lm	Ø68-30-38mm	Ø63-25mm
EVIN-12	12W	1200Lm	Ø49-49-38mm	Ø44-44mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

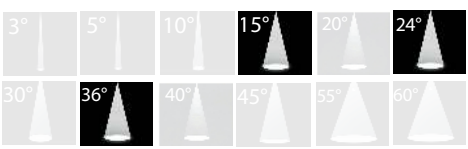

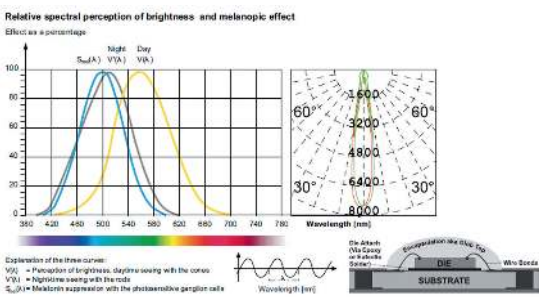

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.