

FURAT



FURAT Spot Light offre un'illuminazione precisa e direzionata, con un design raffinato e contemporaneo. Le sue versatili prestazioni illuminotecniche valorizzano i dettagli architettonici e creano un'atmosfera equilibrata e visivamente armoniosa. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando estetica moderna, prestazioni affidabili e illuminazione efficiente, FURAT dona eleganza e funzionalità a ogni ambiente interno.

FURAT Spot Light offers precise and focused illumination with a refined, contemporary design. Its versatile lighting performance enhances architectural details and creates a balanced, visually appealing atmosphere. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining modern aesthetics, reliable performance, and efficient illumination, FURAT brings elegance and functionality to every interior space.

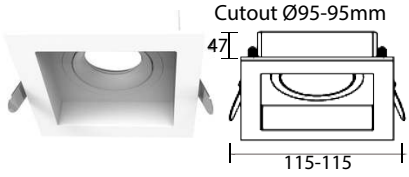

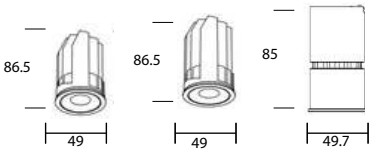



Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
FURAT 5	5W	500Lm	Ø115-115-47mm	Ø95-95mm
FURAT 7	7W	700Lm	Ø212-115-47mm	Ø187-95mm
FURAT 10	10W	1000Lm	Ø300-115-47mm	Ø275-95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

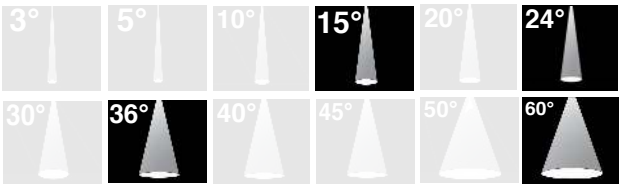

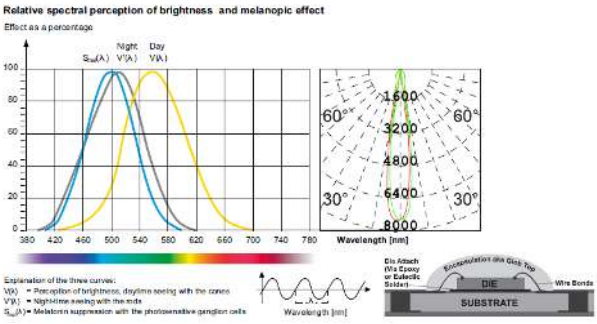

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE LM-79 TM-21 LM-80 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.