GALENA

GALENA presenta un design da incasso regolabile ed elegante, progettato con opzioni ottiche avanzate (varianti Wide Ring e Round Trimless) e ottiche di precisione ad alte prestazioni per applicazioni architettoniche moderne. Offre un'illuminazione direzionale flessibile, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento dinamica e un comfort visivo superiore per ambienti contemporanei.

GALENA features a sleek, adjustable recessed design engineered with advanced optical options (Wide Ring and Round Trimless variants) and high-performance precision optics for modern architectural applications. It offers flexible directional illumination, deep-recessed anti-glare control, and reliable performance—delivering dynamic accent lighting and superior visual comfort for contemporary environments.

CutoutØ55mm



Cutout Ø75mm



CutoutØ95mm




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Matte Black / Matte White / Gun Black / Bright Silver / Gold). Designed for adjustable recessed installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°, 50°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
GALENA RC9	9W	900Lm	Ø75-85mm	Ø55mm
GALENA RC10	10W	1000Lm	Ø85-89mm	Ø65mm
GALENA RC12	12W	1200Lm	Ø95-98mm	Ø75mm
GALENA RC24	24W	2400Lm	Ø120-123mm	Ø95mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

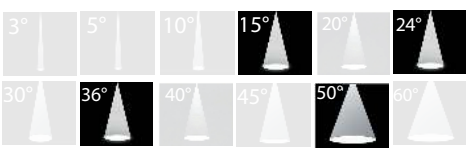

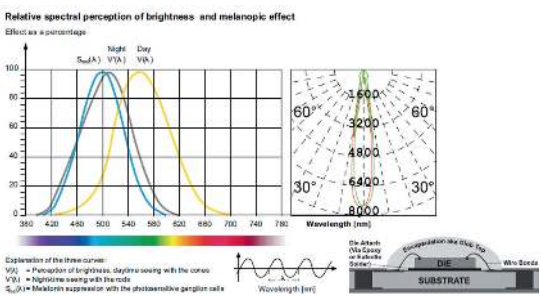

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.