
GINA

GINA presenta un design da incasso regolabile ed elegante, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un controllo flessibile del posizionamento, un'illuminazione confortevole anti-abbagliamento e prestazioni affidabili, garantendo un profilo a soffitto continuo e un comfort visivo superiore per ambienti contemporanei.

GINA features a sleek, adjustable recessed design engineered for modern architectural applications. Crafted with high-performance precision optics, it offers flexible positioning control, comfortable anti-glare illumination, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.




Cutout Ø35mm






Cutout Ø55mm





Cutout Ø65mm



Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Gold finish). Designed for adjustable recessed architectural installation.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Matte White reflector with precision beam control (36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
GINA GI5001	5W	500Lm	Ø40-82mm	Ø35mm
GINA GI9001	9W	900Lm	Ø65-98mm	Ø55mm
GINA GI120014WH	12W	1200Lm	Ø75-102mm	Ø65mm
GINA GI120013WH	12W	1200Lm	Ø85-100mm	Ø75mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k



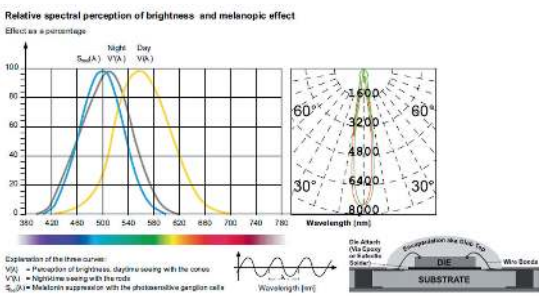

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.