
GRILI TRIMLESS

GRILI Trimless Spot Light offre un'illuminazione precisa e direzionata, con un design elegante e minimalista. L'installazione senza cornice garantisce un'integrazione perfetta nel soffitto, creando un effetto architettonico pulito e raffinato. Ideale per applicazioni architettoniche, commerciali, retail, hospitality e residenziali. Combinando un'installazione discreta, un'estetica raffinata e prestazioni illuminotecniche affidabili, GRILI Trimless valorizza gli interni moderni con un'illuminazione elegante e funzionale.

GRILI Trimless Spot Light offers precise and focused illumination with a sleek, minimalist design. Its trimless installation ensures seamless integration into the ceiling, creating a clean and sophisticated architectural appearance. Ideal for architectural, commercial, retail, hospitality, and residential applications. Combining discreet installation, refined aesthetics, and reliable lighting performance, GRILI Trimless enhances modern interiors with elegant and functional illumination.

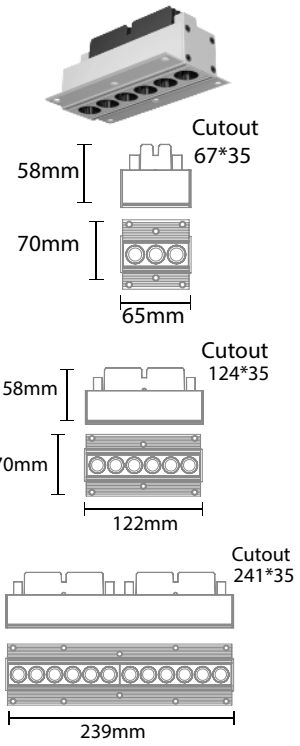



Description

Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W , UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 Glowing wire Test 850°.

Model	Power	Illuminance	Size(mm)	Cutout
GRILI TRIMLESS 6	3×2W	1000Lm	Ø65mm×70mm×H58mm	67×35mm
GRILI TRIMLESS 12	6×2W	1200Lm	Ø122mm×70mm×H58mm	124×35mm
GRILITRIMLESS 24	12×2W	2400Lm	Ø239mm×70mm×H58mm	241×35mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

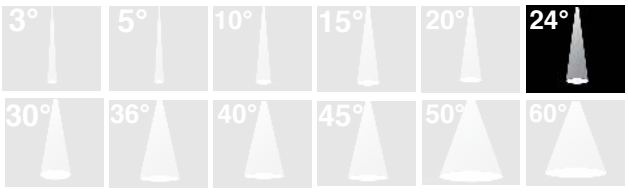

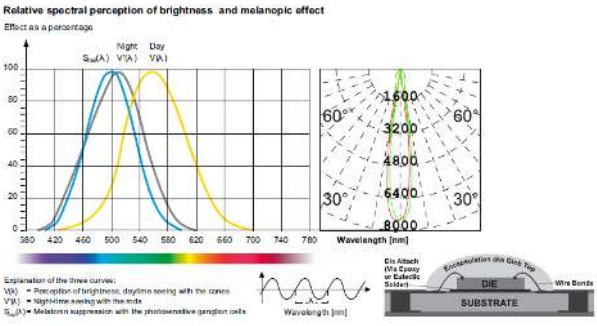

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C - 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.