
# HAVIA

HAVIA è un caratteristico paletto luminoso e da giardino architettonico caratterizzato da un gambo sottile con una testa illuminata circolare inclinata per un'elegante distribuzione verso il basso e radiale. Unendo una tecnologia LED avanzata a una robusta struttura in alluminio e acciaio inossidabile con finitura a polvere Tiger di alta qualità, garantisce una durata superiore in esterni e un elevato impatto estetico per il paesaggio.

HAVIA is a distinctive architectural garden and bollard light featuring a slim stem with an angled, circular illuminated head for elegant downward and radial distribution. Combining advanced LED technology with a robust aluminum and stainless steel structure with a premium Tiger powder coating, it ensures superior outdoor durability and high visual appeal for landscaping.





## Description


**Housing -** Durable aluminum and stainless steel structure with a premium Tiger powder coating for superior outdoor protection.
**Diffuser -** High-transmittance optical diffuser on the ring head for clean, glare-free downward light.
**Reflector -** Precision beam control 360° / Elliptical light (with 30° angled head tilt).
**LED** - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
**Standards** - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

| Model | Power | Illuminance | Size(mm) |
|---|---|---|---|
| HAVIA-7 | 7W | 700Lm | Ø140-16-800mm |
| HAVIA-13 | 13W | 1300Lm | Ø140-16-1600mm |

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

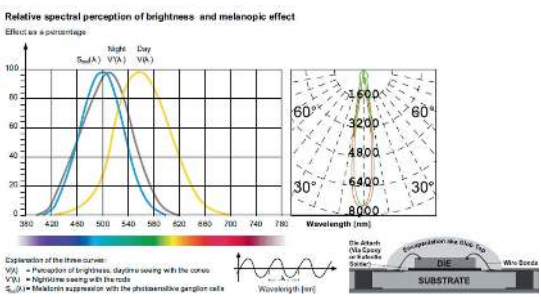


CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP66 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.