
JORELA TRM

JORELA TRM presenta un design quadrato da incasso trimless multi-testa ed elegante, progettato con ottiche di precisione ad alte prestazioni per applicazioni architettoniche moderne. Offre un'illuminazione direzionale focalizzata, un controllo anti-abbagliamento con incasso profondo e prestazioni affidabili, garantendo un'illuminazione d'accento pulita con un comfort visivo superiore per ambienti contemporanei.

JORELA TRM features a sleek, trimless square recessed multi-head design engineered with high-performance precision optics for modern architectural applications. It offers focused directional illumination, deep-recessed anti-glare control, and reliable performance—delivering clean accent lighting with superior visual comfort for contemporary environments.




Cutout Ø70-70mm





Cutout Ø150-44mm




Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating. Designed for trimless square recessed multi-head installation.
Diffuser - Deep-recessed optical lens.
Reflector - Anodized aluminum with precision beam control (15°, 24°, 36°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
JORELA-TRM12	12W	1200Lm	Ø68-68-61mm	Ø70-70mm
JORELA-TRM13	13W	1300Lm	Ø147-42-60mm	Ø150-44mm

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- TUNABLE SMART

k

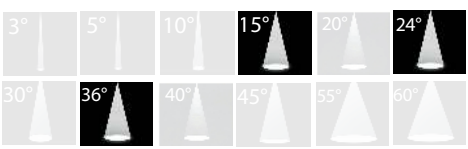

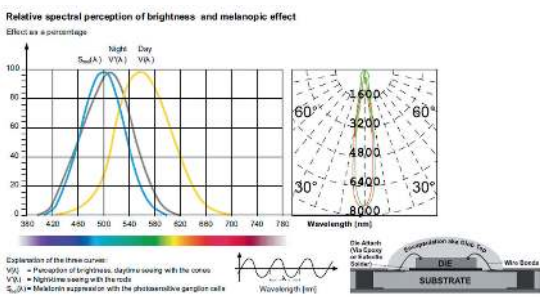

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP65 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.