


KONA SPOT

KONA SPOT è caratterizzato da un design compatto e lineare per installazione a superficie, progettato per applicazioni architettoniche moderne. Realizzato con ottiche di precisione ad alte prestazioni, offre un controllo flessibile dell'angolo del fascio luminoso, un'illuminazione confortevole antiriflesso e prestazioni affidabili, garantendo un profilo a soffitto continuo e un superiore comfort visivo per gli ambienti contemporanei.

KONA SPOT features a sleek, surface-mounted compact design engineered for modern architectural applications. Crafted with high-performance precision optics, it offers flexible beam angle control, comfortable anti-glare illumination, and reliable performance—delivering a seamless ceiling profile and superior visual comfort for contemporary environments.








Description


Housing - High-pressure die-cast aluminium housing with solvent-free double anti-corrosion powder coating (Brass/Black). Designed for surface-mounted installation.
Diffuser - Deep-recessed polycarbonate lens.
Reflector - Anodized aluminum with precision beam control (15°/24°/36°/60°).
LED - Sustainable energy savings enabled by advanced LED technology (Efficiency: 100 Lm/W, UGR<19).
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h, Ta -20°C ~ 50°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722, Glowing Wire Test 850°

Model	Power	Illuminance	Size(mm)	Cutout
KONA 9001	9W	900Lm	Ø62-47mm	-
KONA 12001	12W	1200Lm	Ø62-44mm	-
KONA 18001	18W	1800Lm	Ø62-71mm	-

- **6500 K**
- **6000 K**
- **5000 K**
- **4000 K**
- **3000 K**
- **2700 K**
- **TUNABLE SMART**

k

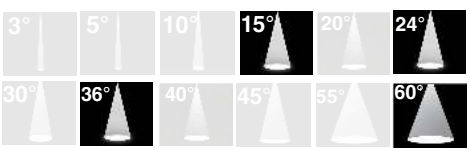

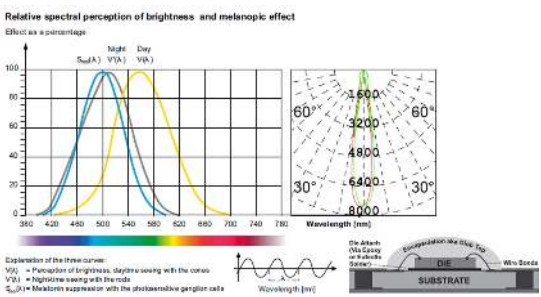

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

LED | IP20 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

Adjusting | CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | RoHS | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.