
LENA HEX 50

LENA HEX 50 LED è un apparecchio di illuminazione dal design esagonale contemporaneo, progettato per offrire un'illuminazione uniforme e omogenea con un profilo geometrico deciso e distintivo. Il suo elegante design esagonale aggiunge un elemento architettonico sofisticato agli interni moderni, creando un perfetto equilibrio tra estetica e funzionalità. Ideale per uffici, negozi, hotel, ambienti commerciali e spazi residenziali, combina la tecnologia LED ad alta efficienza energetica con prestazioni affidabili e durature. Unendo un design minimalista a un'eccellente qualità della luce, LENA HEX 50 LED offre una soluzione illuminotecnica elegante ed efficiente per un'ampia gamma di applicazioni.



LENA HEX 50 LED is a contemporary hexagonal lighting fixture designed to deliver smooth, uniform illumination with a bold and distinctive geometric profile. Its elegant hexagonal design adds a sophisticated architectural element to modern interiors, creating a perfect balance between aesthetics and functionality. Ideal for offices, retail spaces, hotels, commercial environments, and residential settings, it combines energy-efficient LED technology with reliable long-lasting performance. Blending minimalist design with excellent lighting quality, LENA HEX 50 LED provides a stylish and efficient lighting solution
for a wide range of applications.




Description


Housing -Die cast aluminium powder coated with choice of RAL colors
Diffuser - Tempered clear glass.
Reflector - Anodized aluminium reflector with optical PMMA refletor lens.
LED - sustainable energy savings enabled by advanced LED technogy (Efficiency: 100Lm/W m UGR<19)
L80 / B10 @ 50,000 h (LM-80 / TM-21)
L70 / B15 @ 100,000 h (projected lifetime under typical conditions)
Failure rate: F10 @ 50,000 h , Ta 25 - 40°C
Standards - Manufactured in accordance with tested as per PTPS IES 62722 , Glowing Wire Test 850°

Model	Power	Illuminance	Profile Size(mm)	Size
LENA HEX - 50	40W/m	4000Lm	W50mm×H75mm	Customizable

- 6500 K
- 6000 K
- 5000 K
- 4000 K
- 3000 K
- 2700 K
- RGB

k

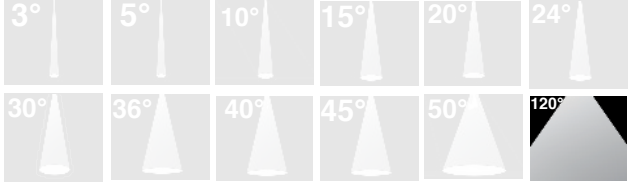

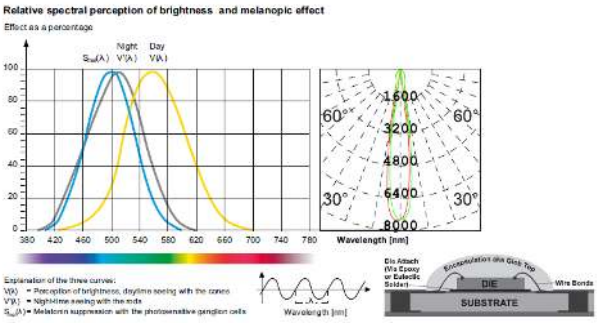

CREE SHARP SAMSUNG PHILIPS CITIZEN TRIDONIC VS LIGHTING SOLUTIONS

SMD | IP20 IP44 | COB | 1-10 DIMMING | DALI | PHASE DIMMING | AC 85-265V 50/60Hz | 100 Lm/W | CRI >90 | UGR <19 | SDCM 2.0/3.0 | CIDET

CE | ANTI GLARE | EYE COMFORT | -25°C 55°C | ENERGY STAR | COMPLIANCE TM-21 | GLOWING WIRE TEST - 850° | UV | RoHS | COMPLIANCE | ECO

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.pro-luce.com are the most recent versions and supercede all other printed or electronic versions.